

Project:	Type:
	Comments:



Highlights

Dual-Dimming Architecture: Phase dimming (Forward phase, MLV, Reverse phase, ELV, TRIAC) and 0-10V dimming (0-10V/1-10V/Potentiometer/10V PWM 4-in-1) compatible.

Ultra-Smooth Dimming: Full 0-100% dimming range with an industry-leading dimming depth of 0.1% and completely flicker-free performance.

Robust Environment Performance: Driver built-in Junction Box; IP-rated enclosure suitable for dry, damp, and wet locations.

Power Efficiency: Built-in active PFC function achieving high power factor (PF > 0.9) and an overall efficiency up to 88%.

Full Certifications: cULus Listed (E495946), FCC Class 2, TYPE HL, SELV, RoHS, and REACH compliant.

Project:	Type:
	Comments:

Configuration Example

Model #
TECHOLED-MT-24

Ordering Guide:

Select one option from each group below. For a custom preference please contact sales@techoled.com

1-FAMILY	2-DC OUTPUT VOLTAGE	3-OUTPUT POWER
MT-D DRIVER	12 12(VDC)	200 (200W)
	24 24(VDC)	
	48 48(VDC)	

Project:	Type:
	Comments:

Model	MT-12	MT-24	
Certificate	UL / cUL / FCC / TYPE HL / SELV / RoHS / REACH		
Output	DC Voltage	12V	24V
	Voltage Tolerance	±0.5V	
	Voltage Regulation	±0.5%	
	Rated current	16.67A	8.33A
	Rated power	200W	
	Load Regulation	±2%	±1%
Input	Voltage Range	100-277VAC	
	Frequency Range	50 / 60Hz	
	Power Factor @ full load	>0.9	
	THD(Typ.) @ full load	<20%@120VAC & 277VAC	
	Efficiency(Typ.) @ full load	≥85%@120VAC ≥86%@277VAC	≥86%@120VAC ≥87%@277VAC
	AC Current (Max.)	2.3A	
	Inrush Current (Typ.)	15A, 1.4ms @50% 120VAC	30A, 1.4ms @50% 277VAC
	Leakage current	<0.5mA	
Protection	Short Circuit	Shut down o/p voltage, re-power on to recover after fault condition is removed. Or, hiccup mode, automatically recovers after fault condition is removed.	
	Over Load	12V&24V: 105%~125% Constant current mode, automatically recovers after fault condition is removed. 48V: 105%~125% Hiccup mode, automatically recovers after fault condition is removed.	
	Over temperature	Shell surface temp.100°C±10°C shut down o/p voltage, re-power on to recover after fault condition is removed. Or, hiccup mode, automatically recovers after fault condition is removed.	
Environment	Working TEMP. (Ta)	-40~+45°C (see below derating curve)	
	Case Temperature (Tc)	90°C	
	Working Humidity	20 - 95%RH non-condensing	
	Storage TEM.,Humidity	-40 - +80°C,10 - 95% RH non-condensing	
	TEMP.coefficient	±0.03%/°C(0 - 50°C)	
	Vibration	10~500Hz, 5G 12min./1 cycle, period for 72min. each along X,Y,Z axes	
Safety & EMC	Safety standards	UL8750; CAN/CSA-C22.2 No. 250.13	
	Withstand voltage	I/P-O/P: 1.88KVAC I/P-FG: 1.88KVAC O/P-FG: 0.5KVAC	
	Isolation resistance	I/P-O/P: 100MΩ/ 500VDC/ 25°C/ 70% RH	
	EMC Immunity	FCC/ICES do not request this test.	
	EMC Emission	FCC 47 CFR Part 15, Subpart B	
Others	Net Weight	1.8KG	
	Dimension	10.2x4.17x1.92in(L*W*H)	
	Packing	12.6x11.6x9.44in 10pcs/CTN	
Notes	<ol style="list-style-type: none"> All parameters NOT specially mentioned are measured at 120VAC input, rated load, non-dimming state and 25°C of ambient temperature. Tolerance: includes set up tolerance and load regulation. 		

Project:	Type:
	Comments:

MCB recommendation


When the input voltage is 120Vac,the number of LED Driver matched by circuit breakers is as follows:		
MCB Type	Level	The number of LED Driver
C type	10A	5
	13A	6
	16A	8
	20A	10
	25A	11
When the input voltage is 277Vac,the number of LED Driver matched by circuit breakers is as follows:		
MCB Type	Level	The number of LED Driver
C type	10A	3
	13A	4
	16A	5
	20A	6
	25A	7

Note:

1. The above quantities of the led drivers connected on the Type C is recommended base on the maximum ambient temperature is 50 °C.
2. The breaker should be selected according to the input rated voltage, input rated current, ambient temperature, and trip characteristic curve.

Project:	Type:
	Comments:

Dimensions

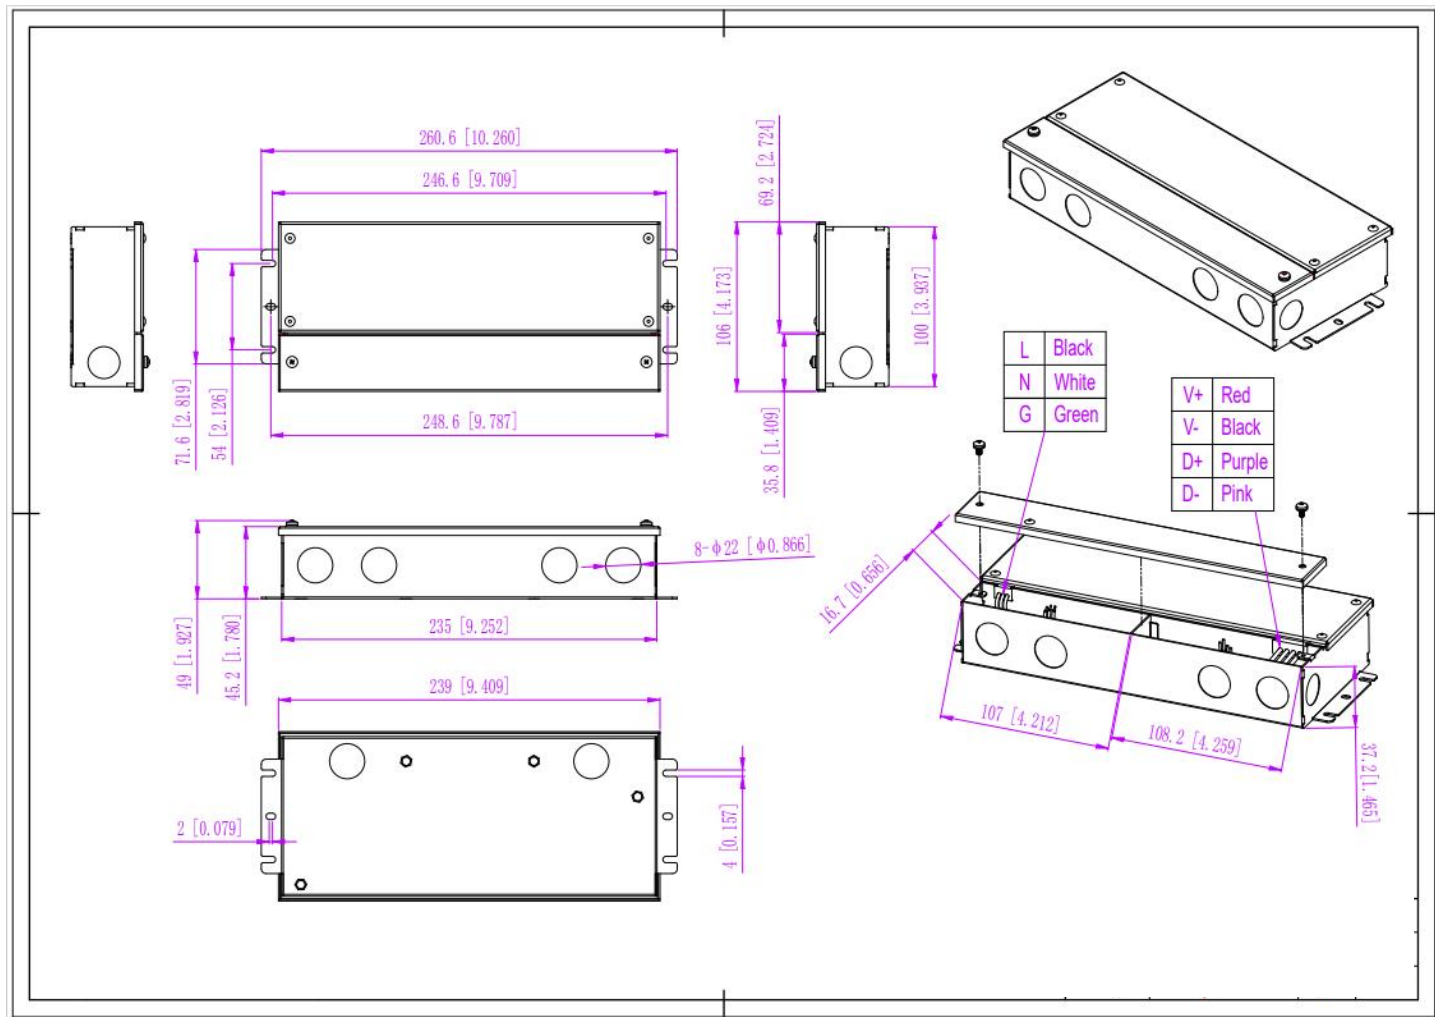

12V&24V&48V Version

Wire gauge

JM96-A1


Input wire	Black(L) White(N) Green(G)(3*18AWG)
Output wire	Red(V+) Black(V-)(2*14AWG)
Dimming wire	Purple(D+) Pink(D-)(2*18AWG)

Remarks: Please make sure your connect these correctly otherwise your product will not function correctly and could be damaged.

Project:	Type:
	Comments:


DIMMING OPERATION AND CONNECTING DIAGRAM

Using two ways of dimming at the same time: You must be assured that LED lighting is up to the max. brightness, then you could operate with the other dimming style.

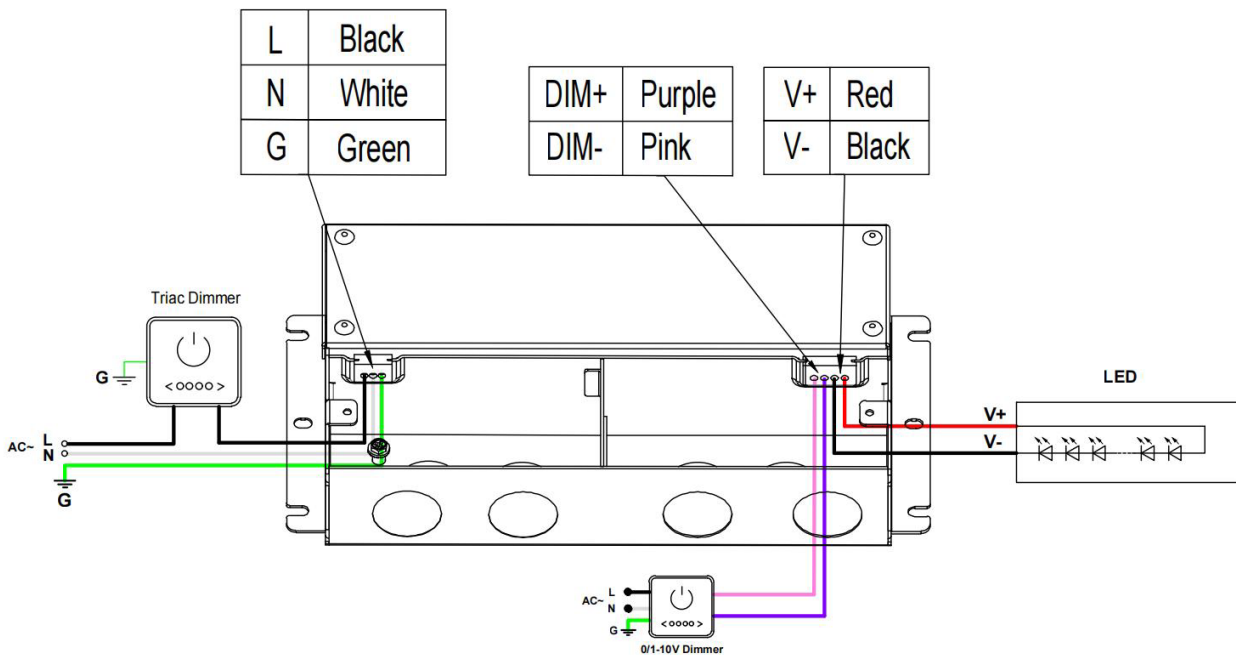

Using one dimming — TRIAC/Phase cut dimming

1. The Pulse-Width Modulation (PWM) of output voltage can be adjusted through the input terminal of the AC phase line (L) by connecting a phase / Triac dimmer or lighting system.
2. Working with Forward phase, MLV and Reverse phase, ELV, TRIAC dimmers or light systems.
3. Min. loading is about 10%
4. Please try to use dimmers with power at least 1.5 times as the output power of the driver.

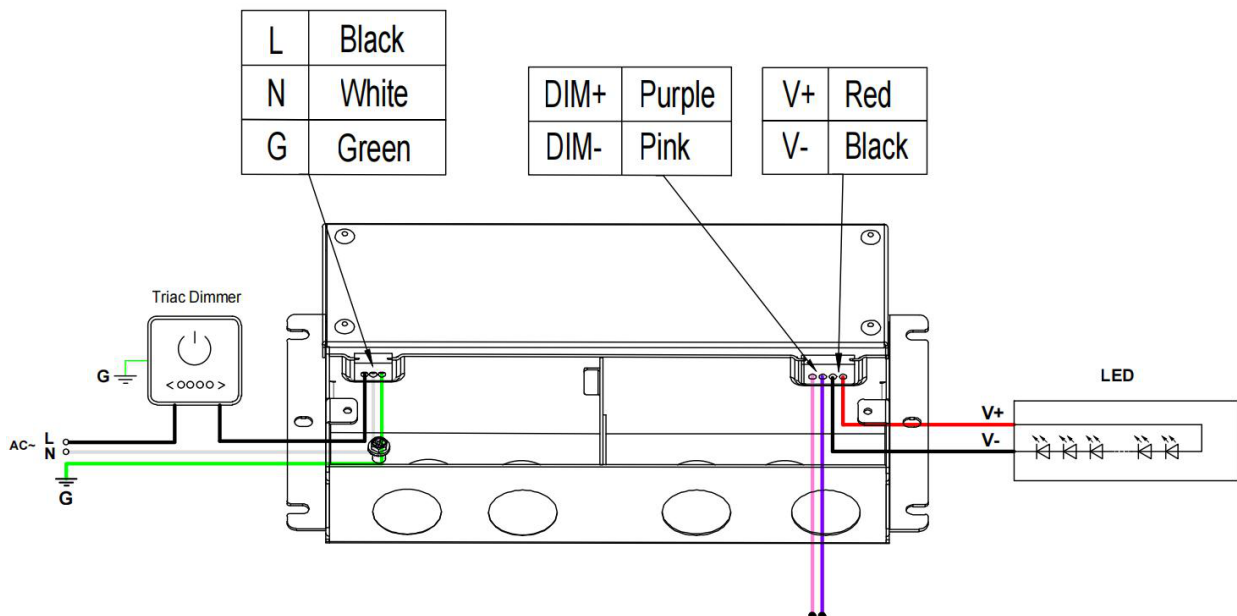

Project:	Type:
	Comments:

- Using one dimming --0-10/ 1-10V/ 10V PWM/ Potentiometer dimming

